


BF-G 带爪形联轴器的型号：技术数据

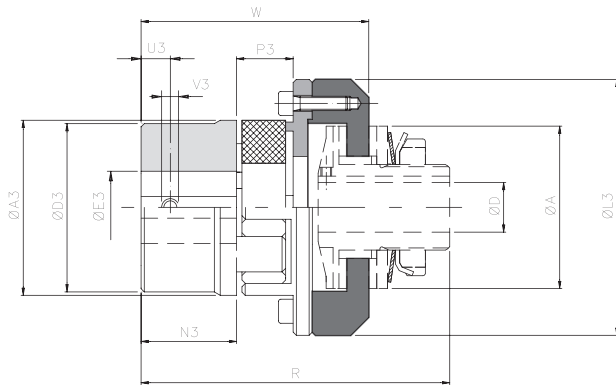

外形尺寸

尺寸	A	D H7		W	P3	R	A3	L3	E3 H7		N3	U3	V3
		预制孔	最大						预制孔	最大			
0	25	-	8	37.5	12	56	30	43	-	16	11	5	M4
1	38	-	12	64	16	84.5	40	58	-	25	25	10	M4
2	50	-	20	74.5	18	94	55	74	-	35	30	10	M5
3	70	-	25	104	24	135	80	107	-	48	45	15	M8
4	90	-	38	115.5	26	148.5	95	132	-	55	50	20	M8
5	115	18	45	143.5	30	181.5	120	164	-	74	65	20	M10
6	140	24	55	181	40	224	160	208	28	95	85	25	M10
7	170	28	65	207.5	45	260	200	246	30	110	100	30	M12
8	205	38	80	236	50	218	295	285	38	115	110	30	M12
9	240	50	100	255	55	245	317	330	50	125	120	33	M16

技术明细

尺寸	扭力[Nm]				补偿			最大转速 [Rpm]	重量 [Kg]
	T0	T1	T2	T3	角度 α [°]	轴向X [mm]	径向K [mm]		
0	-	1 - 8	2 - 12	2 - 20	0°54'	1	0.09	10000	0,2
1	-	1 - 14	8 - 22	15 - 34	1°18'	1	0.20	10000	0,4
2	2 - 12	4 - 40	17 - 70	23 - 100		1	0.22	7600	0.8
3	6 - 18	17 - 60	34 - 120	60 - 210		1.4	0.28	5450	3.3
4	13 - 105	74 - 140	90 - 280	185 - 450		1.6	0.32	4250	5.4
5	65 - 280	120 - 360	207 - 700	210 - 950		1.8	0.38	3350	10.3
6	-	180 - 550	260 - 950	390 - 1200		2.5	0,48	2750	21.1
7	-	160 - 700	300 - 1450	1000 - 2600		2.8	0,50	2250	36.3
8	300 - 1200	500 - 2400	1000 - 4800	-		3.0	0.52	1900	59.9
9	500 - 2000	1000 - 4000	2000 - 8000	-		3.2	0.55	1600	87.7